

TABLE PRO 2

Fact Sheet

TECHNICAL DATA

	TABLE PRO 2 LINEAR		TABLE PRO 2 RADIAL	
Product	9290	with lamp base	9291	with lamp base
	9292	with clamp	9293	with clamp
	9294	through desk	9295	through desk
Colours	01 black 02 white 23 aluminium			
Dimensions	Height:		300 mm–900 mm	
	Radius:	100 mm–800 mm	Radius:	100 mm–700 mm
	Lamp base: (W × D × H):	250 mm × 250 mm × 8 mm	Lamp base: (Ø):	270 mm × 8 mm
	Clamp (B × T × H):		90 mm × 75 mm × 100 mm	
	Pin (Ø):		90 mm	
Material	Aluminium, zinc, steel (lamp base), plastic			
Weight	9290: 6,5 kg 9292 and 9294: 2,5 kg		9291: 5 kg 9293 and 9295: 2 kg	
Energy efficiency	This product contains (a) light source(es) with the energy efficiency class(es) Light source no. 36931, energy efficiency class D (Reg. 1314008)			
Protection type	IP 20			
Protection class	III ⚡			
Illuminants				
LEDs	cold white & warm white LEDs			
Power consumption	cold white 9.45 W Boost 14.3 W			
Nominal luminous flux	cold white 945 lm Boost 1,290 lm			
Illuminance	> 1,000 lux at a height of 75 cm			
Luminous efficiency	cold white 100 lm/W Boost 90.5 lm/W			
Colour temperature (CCT)	2.700 K <-----> 6.500 K			
Colour reproduction index	≥ 80			
Operating temperature on lamp head	≤ 40°C at 25°C ambient temperature			
Burning life	over 50,000 hours			
Standby consumption	≤ 0.5 W			
Nominal voltage	12–14 V DC			
VITACORE®				
Operation	via VITACORE® electronics			
Light intensity setting	stepless			
Setting of light colour	stepless between 2,700 and 6,500 Kelvin			
Boost function	for maximal cold white lighting			
Automatic switch-off function	after 4 hours (can be deactivated)			
USB-A charging ports	2x max. 1A			
Touch panel	made of plastic			
Power supply unit				
Desktop power supply	Europlug & BS 1363 (British 3-pin) plug			
Cable length	AC 1.2m DC 1.8m			
Power consumption	100–240 V, 50–60 Hz, 1.5A			
Output	max. 13.5 V DC, 54W			

TECHNICAL VIEW

TABLE PRO 2 LINEAR
BASE
9290

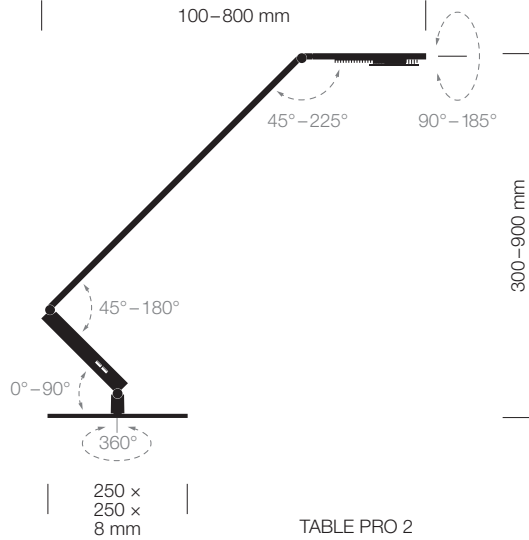


TABLE PRO 2 RADIAL
BASE
9291

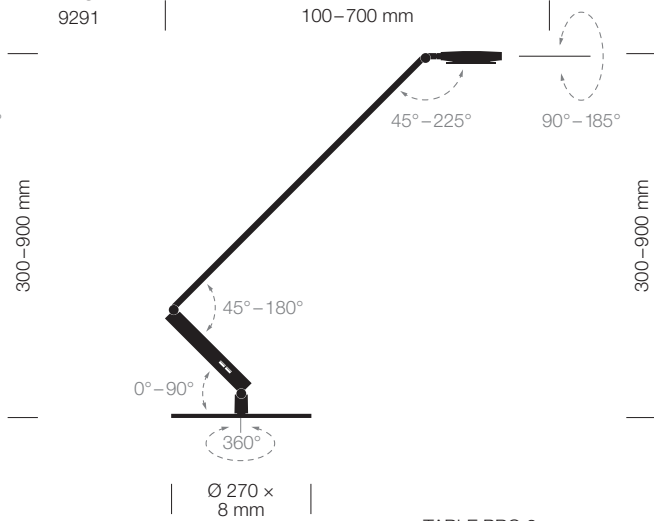


TABLE PRO 2
CLAMP
9292 LINEAR
9293 RADIAL




TABLE PRO 2 CLAMP
The clamp of LUCTRA® TABLE PRO 2 allows the lamp to be attached to table thickness up to 78 mm. It allows wall mounting, too.

TABLE PRO 2
PIN
9294 LINEAR
9295 RADIAL



TABLE PRO 2 PIN
The LUCTRA® TABLE PRO 2 pin holds the lamp firmly in hole throughputs between 20 and 80 mm. With integrated cable management.

LIGHT DISTRIBUTION CURVE

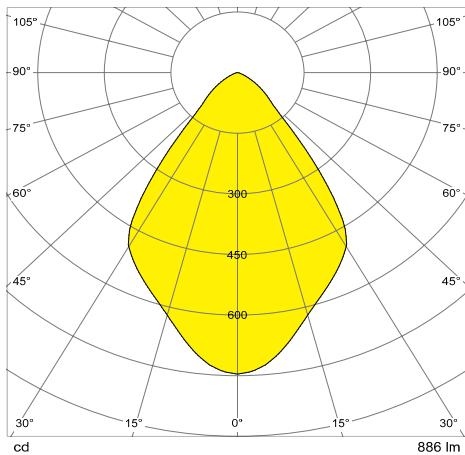

Free download at www.luctra.eu

LUCTRA

LUCTRA® is a brand of
DURABLE · Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77-79 · 58636 Iserlohn
Postfach 1753 · 58634 Iserlohn
Tel.: +49 23 71 66 24 45
info@luctra.eu · www.luctra.eu